

LED WALL PACK

www.LightingAtlanta.org
 Tel: 770-317-9191
 E-mail: 770-317-9191

Product Description

The LED Wall Pack has a same look as traditional Wall Packs, but with over 120-130lm/W light efficiency, best aluminum heat dissipation heat sink, and equipped with long lasting 50,000 hour LED driver, it is ideal for replacing old 175W-600W HID Wall packs.

Application

Outdoor building, Wall area, General area and Security lighting etc.



Electric Characteristic


	LS-WP41W	LS-WP60W	LS-WP80W	LS-WP100W	LS-WP120W	LS-WP150W
LED Chips	Philip3030					
	41W	60W	80W	100W	120W	150W
Efficiency	4800-5200LM	7700-7800LM	9600-10400LM	12000-13000LM	15000-16000LM	18000-19500LM
	120-130LM/W	120-130LM/W	120-130LM/W	120-130LM/W	120-130LM/W	120-130LM/W
CRI	75Ra					
	3000/4000K/5000K		5000K standard			
	100-277V UL Driver					
Lighting beam	120Deg.					
Power Factor	0.9					
Total Harmonic Distortion	13.4%					
lamps efficiency	90%					
Certificates	ETL,CETL,DLC					

Ordering Information

Example: LS-WP41W-50K-N-T (Photo Cell version is not stocked)

	Power	Replacement			Furnish
LS-WP41W(5000K)	41W	150-175W MH/HPS	30K=3000K 40K=4000K 50K=5000K	N not photocell Y yes photocell	WP=Wall Pack
LS-WP60W(5000K)	60W	175-250W MH/HPS			
LS-WP80W(5000K)	80W	250-320W MH/HPS			
LS-WP100W(5000K)	100W	320-400W MH/HPS			
LS-WP120W(5000K)	120W	400-500W MH/HPS			
LS-WP150W(5000K)	150W	500-600W MH/HPS			

Photometri

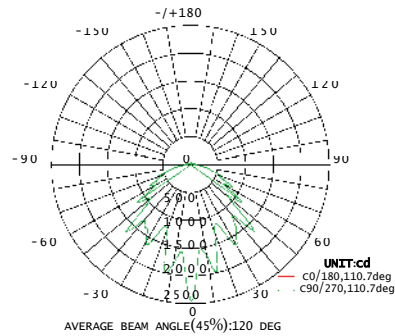


Projected LED Lumen Maintenance

Operating hours	0	25000	50000
Lumen maintenance factor	1	0.91	0.8

Data references the extrapolated performance projections for the WALLPACK LED platform in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11)

Dimensions:

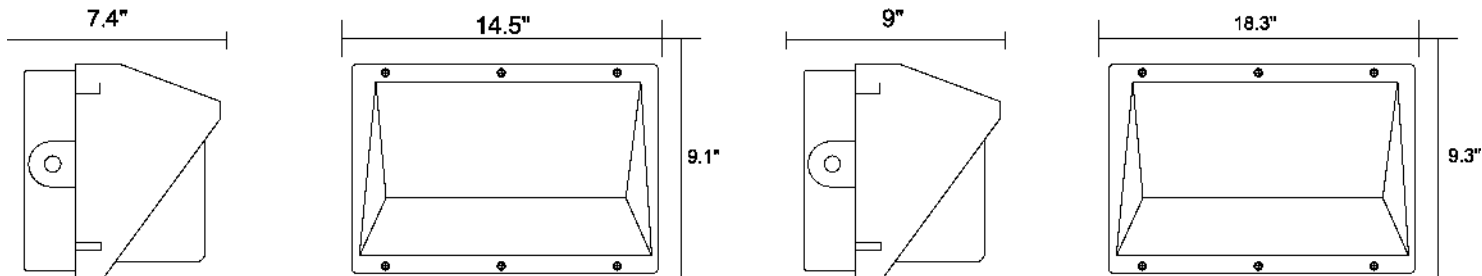

After sale Service:

Please Contact us.

NOTE: Actual performance may differ as a result of end-user environment and application. All values are due to change without notice