

**PRODUCT DESCRIPTION:**


Industrial and commercial applications. For road and area lighting like: parking decks, auto dealerships, high masts, apartments, residential complexes, shopping malls, sporting complexes and fields, educational facilities, streets, roadways, parks, recreational bike paths, and municipal lots.

**FEATURES:**

- Philips Lumileds 3030 LED chips
- Heavy duty die-cast aluminum housing
- fully sealed with an IP rating of 65
- High quality tempered glass optics
- Polyester powder-coated finish, rust and corrosion proof; stabilized to extreme climate changes without cracking or peeling

**DIMENSIONS:**

DIMENSION Inch(mm)

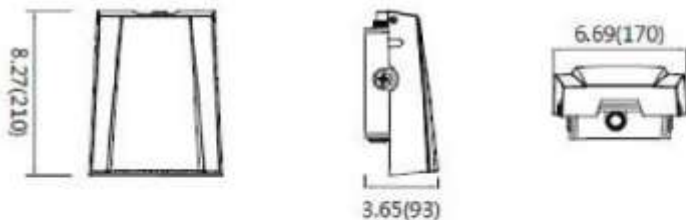

**Wall Pack 75W Spec**

LD-AWP-75W-50K-LV-V12



# Wall Pack 75W Spec

## SPECIFICATIONS:

SPECIFICATION	Details
Model	LD-AWP-75W-50K-LV-V12
Input Wattage (W)	75W
Lumens Delivered (LM)	9,000LM
Efficacy (LM/W)	120LM/W
CRI	70
Lifespan	50,000 hours
Color Temperature	5,000K
Wattage Equivalent	320W
Dimmable	Yes
IP Rating	IP65
Beam Angle	100
Input Voltage	AC120-277V
Power Factor	0.94
Housing	Aluminum
Lens	Frosted
Mounting	Wall Surface
THD	12.8%
Size	10.75" x 9.75" x 4.0"
Certification	DLC, ETL
Operating Temperature	-40°C to 40°C
Environment	Outdoor
Warranty	5 years limited

## OPTIONAL ACCESSORIES



10KV SPD  
120-277V



BUTTON STYLE  
PHOTOCELL  
120-277V



DIMMABLE MOTION  
SENSOR  
120-277V



## INSTALLATION

