


LIGHTING ATLANTA

400W-600W METAL HALIDE EQUIVALENT

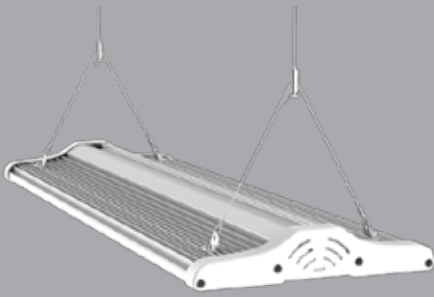

HBL-18050 180W LINEAR HIGH BAY

HBL-18050 OVERVIEW

HBL-18050	
AC Voltage	120-277
AC Wattage	183
Lumens Delivered	24,400
Efficacy (Lm/W)	133
CRI	>75
Color (CCT)	5000K
Dimming	0-10V Std
LED Beam Angle	60°x120° (aisle optics) 120° (remove optics)
Certifications	ETL & DLC Listed
LEDs	Nichia
Color	White & Silver
Controls (optional)	Motion Sensor
Weight (lbs)	7.3
Dimensions	12.0" W x 26.0" L x 2.5" H
Mount	Hanger Cables Included
Environment Temperature	-30° to 45° C

PREMIUM QUALITY COMPONENTS & THERMALLY SUPERIOR

The HBL-18050 luminaire is an impressive high bay both visually and by its construction. Unlike the majority of other linear high bay fixtures, the Aisle Litr 180 has a solid aluminum extrusion for its main cooling body. Others use flat painted steel with far less thermal conductivity than aluminum and also no high surface area cooling fins. Pure polycarbonate lenses over each LED circuit board are ideal for long life and efficient light transmission. Each of the High Bay Aisle lights use Inventronics, a top international brand, of dimmable drivers.

LIGHT DISTRIBUTION

Does your high bay application call for asymmetric light distribution, that is more concentrated light on aisles or on rows of work places and with normal LED light distribution around these areas, then the SSL Aisle 240 Watt is your solution. If you prefer full flood light distribution, simply slide the aisle lenses out of their slots.

WIRELESS CONTROLS

For optimum control and energy efficiency, simply add our wireless smartphone control for scheduling of dimming, on/off, groups, etc. An optional adjustable motion sensor good to 40ft is also available.



60x120 Degree Beam



WITH OPTICS INSTALLED

RISK FREE 30 DAY TRIAL